

Gen-Eye POD™

Pipe Inspection/Location System

The lightweight, **Gen-Eye POD™** and **MINI-POD™** combine camera, reel, and monitor in an all-in-one package.


You get a large 5.6" LCD color monitor protected by a padded case. It's mounted on a rugged yet flexible gooseneck that swivels to give you the best viewing angle, wherever you're working.

The full size Gen-Eye POD™ features a self-leveling camera and 200 ft. of Gel-Rod® for trouble-shooting 3" to 10" drain lines. The big capacity MINI-POD™ carries 125 ft. or 175 ft. of push-rod and color mini-camera for inspecting 2" to 4" drain lines. The tough steel frame can be operated vertically or horizontally, so you can handle nearly any application.

There's lots more, like a picture inverter, both AC and DC power cords, LED Dimmer Control, 3" Trap Skid, and a 512 Hz transmitter (optional with MINI-POD). A video out connection lets you record on an external device.



General
PIPE CLEANERS
www.drainbrain.com

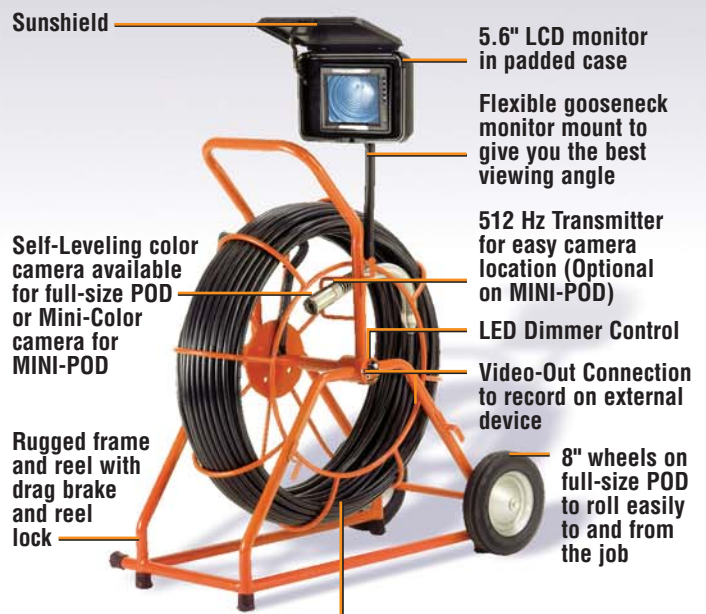

Full size POD carries 200 ft. of Gel-Rod® for 3" to 10" lines
MINI-POD carries 125 ft. or 175 ft. of push-rod to inspect 2" to 4" lines

Gen-Eye POD™ & MINI-POD™

Pipe Inspection/Location System



Gen-Eye POD™ Units

Catalog Number	Description
SL-GP-E	POD with Self-Leveling Color Camera, 200 ft. Gel-Rod, and Sonde.
SL-GP-F	Same as SL-GP-E, plus Digital Locator with Padded Bag.
C-GP-E	POD with Color Camera, 200 ft. Gel-Rod, and Sonde.
C-GP-F	Same as C-GP-E, plus Digital Locator with Padded Bag.

Camera Options:



Self-Leveling Color Camera



Color Mini Camera



Gen-Eye MINI-POD™ Units

Catalog Number	Description
C-GP-A	MINI-POD with 125 ft. Push-Rod and Sonde.
C-CP-B	Same as C-GP-A, plus Digital Locator with Padded Bag.
C-GP-C	MINI-POD with 175 ft. Push-Rod and Sonde.
C-GP-D	Same as C-GP-C, plus Digital Locator with Padded Bag.
C-GP-A-LS	MINI-POD with 125 ft. Push-Rod, without Sonde.
C-GP-C-LS	MINI-POD with 175 ft. Push-Rod, without Sonde.



Digital Locator

Gen-Eye POD™ and MINI-POD™ Specifications:

	Full Size POD w/ Self-Leveling Color Camera	Full Size POD w/ Full Size Color Camera	MINI-POD w/Color Mini Camera
Line Capacity	3" to 10"	3" to 10"	2" to 4"
Reel Capacity	200 ft.	200 ft.	125 or 175 ft.
Sensitivity	.5 Lux	.5 Lux	.5 Lux
Lighting	16 White LED's	16 White LED's	8 White LED's
White Balance	Auto High Speed	Auto High Speed	Auto High Speed
Camera Dimensions	1.375" Dia. x 2.3" Long	1.375" Dia x 1.85" Long	1" Dia. x 1.8" Long
Push-Rod Diameter	.475" Gel-Rod®	.475" Gel-Rod®	.400"
Reel Dimensions	29" L x 16" W x 33-1/2" H	29" L x 16" W x 33-1/2" H	18" L x 16" W x 19" H
Video Format	NTSC or PAL	NTSC or PAL	NTSC or PAL
Power	110v/60 Hz AC, 12 VDC	110v/60 Hz AC, 12 VDC	110v/60 Hz AC, 12 VDC
Operating Temperature	14° F to 122° F -10° C to 50° C	14° F to 122° F -10° C to 50° C	14° F to 122° F -10° C to 50° C

General / **General Wire Spring Co.**
PIPE CLEANERS
 1101 Thompson Avenue • McKees Rocks, PA 15136 USA
 800-245-6200 or 412-771-6300 • Fax: 412-771-2771
 www.drainbrain.com • e-mail: info@drainbrain.com

The toughest tools down the line.™