


Flat Sewer Rods

A Sturdy Tool for Cleaning Drain Lines and Sewers

Oil tempered spring steel is resistant to rusting and kinking. The rod is bolted to the frame at the back, so it can't spring out of the frame when you near the end. A comfortable, efficient Quick-Grip Handle makes the work go faster.

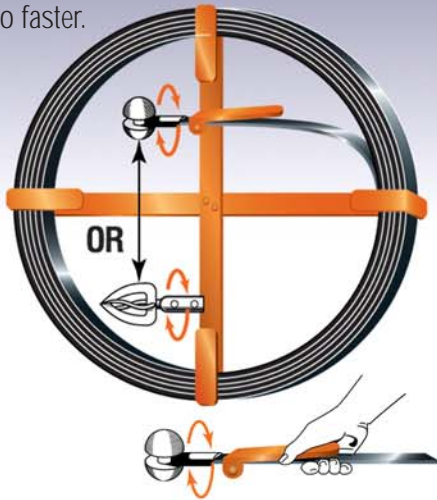

All sizes furnished with Quick-Grip Handle and Roller Head, unless another head is specified.

Size	Catalog Number	Feet	*Weight Pounds with Holder
1/2" x 1/16" 2" thru 3" pipe	25 B	25	5
	50 B	50	7-1/2
	75 B	75	10
	100 B	100	12-1/2
3/4" x 1/16" 2" thru 4" pipe	25 C	25	5-1/2
	50 C	50	10
	75 C	75	14
	100 C	100	18
1/2" x 1/8" 2" thru 4" pipe	25 H	25	9-1/2
	50 H	50	14
	75 H	75	18
	100 H	100	22
	150 H	150	33
3/4" x 1/8" 4" thru 6" pipe	200 H	200	44
	50 D	50	19
	75 D	75	27
	100 D	100	35
	150 D	150	53
1" x 1/8" 4" thru 8" pipe	200 D	200	71
	50 I	50	27
	75 I	75	38
	100 I	100	49
	150 I	150	71
	200 I	200	93

* Add 1 pound to weight when ordered with Flexible Cutter.

Flat Sewer Rod Cutters

Revolving Roller Head



Catalog Number	For Rod Size	Diameter Head	Weight Pounds
1-R	B	1-1/8"	1/4
2-R	C, H, and D	1-1/2"	1/2
3-R	I	3"	1-3/4

Revolving Spear Head



Catalog Number	For Rod Size	Size Head	Weight Pounds
1-S	B, C, and H	1-1/4" x 1-3/4"	1/4
2-S	D and I	2-1/2" x 3-1/2"	3/4

Flexible Roller Head



Catalog Number	For Rod Size	Diameter Head	Weight Pounds
F-1R	B	1-1/8"	1/2
F-2R	C, H, and D	1-1/2"	1-1/2
F-3R	I	3"	2-3/4

Flexible Spear Head



Catalog Number	For Rod Size	Size Head	Weight Pounds
F-1S	B, C, and H	1-1/2" x 1-3/4"	1/2
F-2S	D and I	2-1/2" x 3-1/2"	1-3/4

The spring on Flexible Roller Head and Flexible Spear Head helps guide them around sharp bends that would be difficult or impossible to pass through with a conventional cutting head.