

J-2512 Typhoon™

General's water jets are ideal for clearing soft stoppages and ice from drain lines. They use a stream of high pressure water that hits the stoppage and flushes it away. The thrust of the nozzle drives the hose down the line and gives you wall-to-wall pipe cleaning action. You'll find plenty of uses for General's jetters – in restaurants, hotels, hospitals, shopping malls, factories, and septic systems.



General's Jet-Set™ gives you a new weapon to use on some of your toughest stoppages.

The J-2512 Typhoon™ trailer jet is ideal for clearing big lines with high water flow requirements or remote jobs far from a water source. 12 gallons of water pulsate down the line every minute at a powerful 2500 psi to blast lines clear of grease, sediment, and debris. The 200 gallon holding tank carries enough water to handle remote applications where access to water is limited.

A 24 hp Honda engine with electric start powers the 2500 psi, 12 gpm pump with Vibrapulse® through a 2 to 1 V-belt reducer. Two hose reels – a jet hose reel with 400 ft. x 1/2" capacity featuring electric variable speed rewind, and a supply hose reel carrying 150 ft. x 3/4" hose – are mounted at the rear of the unit next to the pressure gauge and output valve. Engine controls, including an hour meter, are mounted within easy reach in the lockable tool box with slide action doors just below the reels.



Remote control panel protected inside locked toolbox.

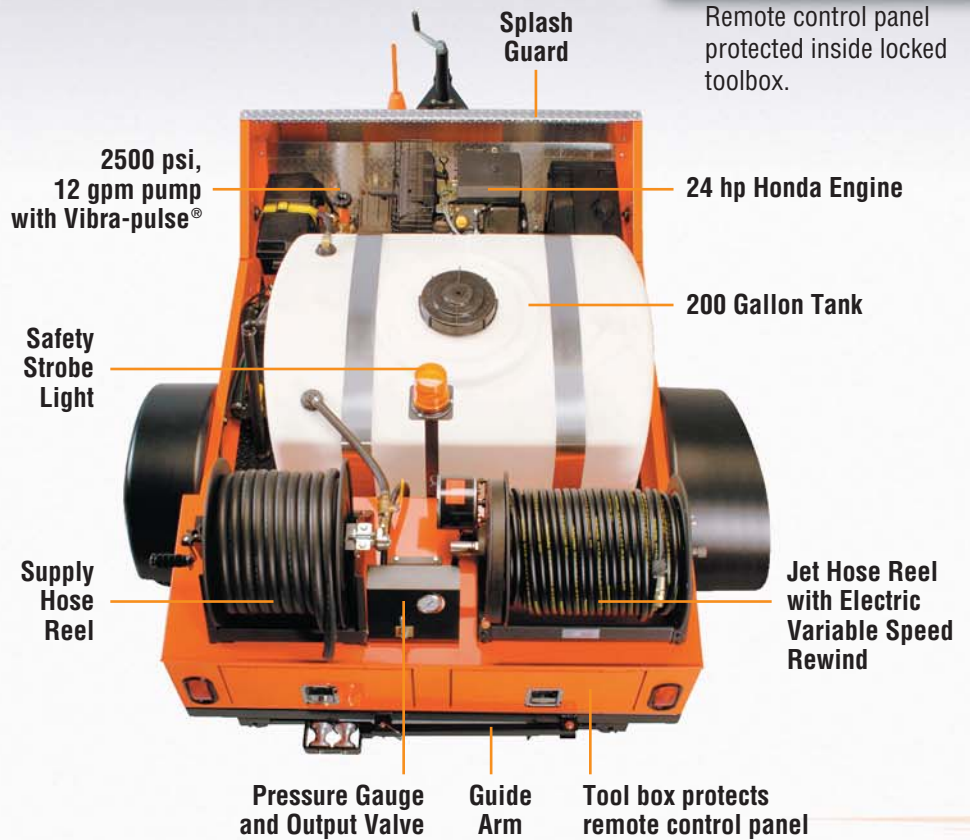

Big cleaning power in a tough new package.



The trailer is mounted on a leaf spring suspension system, rated for 3500 lbs. per axle with Accu-Lube hubs, and rides on 15" radial tires with modular wheels. A splash guard at the front protects the pump and motor from road debris. The body is protected by a durable powder-coated epoxy finish for added weather protection.

Standard safety features include electric brakes, safety strobe light, three 18" safety cones with holder, rear fold down stabilizer jacks, and retractable guide arm. An antifreeze system protects the unit from freeze damage. Complete with spray wand with trigger.



J-2512 Typhoon™ Specifications:

Pump:

Triplex w/Vibra-pulse®

Pressure:

2500 psi

Flow:

12 gpm

Engine:

24 hp Honda w/Low oil shut off, electric start, and V-belt reducer

Tank Capacity:

200 gallons

Jet Hose Reel:

Electric variable speed rewind, brass swivel
400 ft. x 1/2" hose capacity

Supply Hose Reel:

Manual, brass swivel, drag brake, and reel lock,
150 ft. x 3/4" hose capacity

Safety features:

Electric brakes, safety strobe light, three 18" safety cones with holder, rear fold down stabilizer jacks, and retractable guide arm.

Weight:

1800 lbs. empty; 3200 lbs. loaded

Trailer Dimensions:

135" L x 73" W x 57" H (343 cm x 185.5 cm x 145 cm)

Skid Mount Dimensions:

96" L x 51" W x 46" H (244 cm x 129 cm x 117 cm)

