

# Sewerooter T-3™

**For inside jobs from 1-1/4" thru 4" in diameter.**

The Sewerooter T-3 combines large capacity with great portability. The drum holds 100 feet of 1/2" cable, which is fed into the line with a smooth-operating variable speed power cable feed. The machine rolls on big 8" wheels, has a tough but light-weight tubular frame, and a tall folding handle with a truck loading wheel that makes it easy to move around. A wheel brake holds machine securely on the job.

Other important features include a quickly removable drum, a Slide-on Snakentainer for handling small diameter cables, and a 1/3 hp motor with capacitor. Like all General's floor models, the Sewerooter T-3 offers you the safety of a fully grounded electrical circuit, a pneumatic foot pedal and reverse switch with an "off" position, plus a ground fault circuit interrupter.



FOLDING HANDLE

**The toughest tools down the line.™**  
**General** / **General Wire Spring Co.**  
**PIPE CLEANERS** | 1101 Thompson Avenue • McKees Rocks, PA 15136 USA  
800-245-6200 or 412-771-6300 • Fax: 412-771-2771  
www.drainbrain.com • e-mail: info@drainbrain.com

Continued next page

# Sewerooter T-3™

## SLIDE-ON SNAKENTAINER


If you want to use small diameter cables in your Sewerooter T-3, get a Slide-on Snakentainer. It enables you to use a smaller cable without losing time coiling it into the machine drum.

Just push the loaded Slide-on Snakentainer into the distributor tube and lock it into place. You can do it in seconds. Smaller diameter cables work more efficiently in the Slide-on Snakentainer because a cone inside the container prevents tangling.




## POWER CABLE FEED

The Sewerooter T-3's power cable feed is a real labor saver. It enables you to vary feeding speed in and out of a line more easily than you could manually and also gives you better control when working through tough stoppages. In addition, you can reverse instantly if you hit an obstruction. The power cable feed drives 1/2" and 3/8" cables.

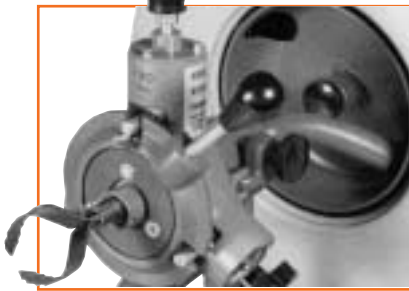

## GUIDE TUBE

Greatly increases the efficiency of units equipped with power cable feed attachments by reducing cable whipping and drag. In addition, when it's difficult to get the machine close to the drain opening, a Cable Guide Tube and extension can literally take you out of the hole. Tube is about 30" long and 1" in diameter. Five foot extensions are made of rigid conduit with a flexible end.

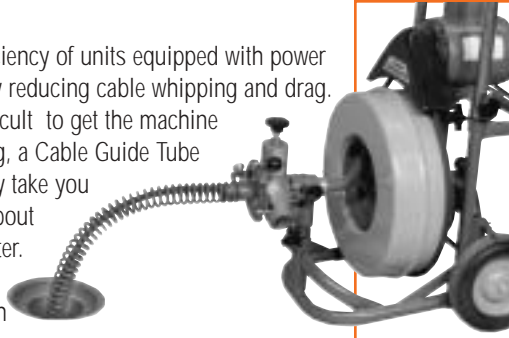

## FLEXICORE® CABLE



### Wire Rope Center Construction

Heavy-gauge wire coiled tightly around 42-strand aircraft-type wire rope and heat treated. Has unequalled strength and the right amount of flexibility. So tough it carries a one-year warranty against defect or breakage.

Flexicore Patent Nos. 2,244,735 and 2,849,870

## SPECIFICATIONS:

### Weight:

61 lbs. (28 kg) less cable.

### Overall Height:

37"; 25" with handle folded down.

### Drum:

Equipped with inner drum and distributor tube to prevent cable tangling under load. Cable can be driven or retracted from line while cable is rotating. Quickly removable from frame.

### Capacity:

100 ft. (30 m) of 1/2" (12.7 mm) Flexicore wire rope center cable. Use 1/2" cable for 3 – 4" lines; 3/8" cable for 2 – 3" lines; 1/4" or 5/16" for smaller lines.

### Motor:

1/3 hp heavy duty, capacitor-type with reverse.

### Load Speed:

167 rpm.

### Wheels:

8" semi-pneumatic tires with oilite bronze bushings. Brake locks wheels during operation.

### Foot Switch:

Pneumatic, with no electrical contact between pedal and motor.

### Extension Cord:

20 foot 3-wire. In-line ground fault circuit interrupter.

### Bearings:

Oilite bronze.

### Power Cable Feed:

Feeds and retracts cable at variable speed by moving control handle up or down.

### Leather Gloves:

With double-reinforced palm, for hand protection when guiding cable.

### Standard T-3 Cutter Set:

13" Flexible Leader, Arrow Head, 1-1/2" U-Cutter, 2" Side Cutter Blade, 3" Side Cutter Blade, 4" Side Cutter Blade, 3" Rotary Saw Blade, and Small Retrieving Tool.

### Cables:

1/2" diameter for 3 – 4" lines (not for roots),  
3/8" diameter for 2 – 3" lines,  
1/4" diameter for 1-1/4 – 2" lines.

**The toughest tools down the line.™**

**General** / **General Wire Spring Co.**  
**PIPE CLEANERS**

1101 Thompson Avenue • McKees Rocks, PA 15136 USA  
800-245-6200 or 412-771-6300 • Fax: 412-771-2771  
www.drainbrain.com • e-mail: info@drainbrain.com